

ENGINE BOLTS TIGHTENING SPECIFICATIONS TECHNICAL INFORMATION





TIGHTENING TORQUES	
1	35 Nm
2	35 Nm
3	50 Nm
4	22 Nm
5	22 Nm
6	22 Nm

Suggested tightening sequence: 1-2-3-4-5*-6



The tightening must also be carried out symmetrically on the opposite side of the bike.




* The total number of screws on the lower plate is 4.



ENGINE BOLTS TIGHTENING SPECIFICATIONS TECHNICAL INFORMATION



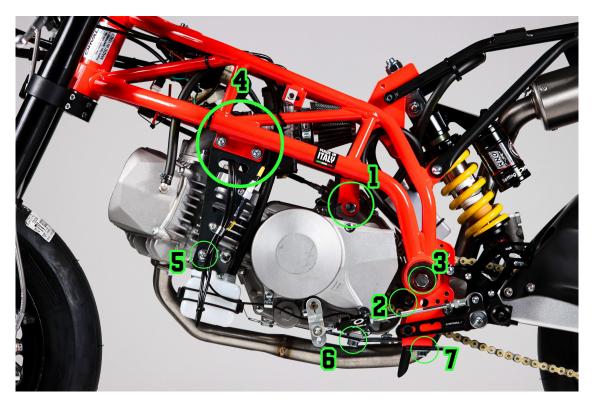

TIGHTENING TORQUES	
1	35 Nm
2	35 Nm
3	50 Nm
4	22 Nm
5	22 Nm
6	22 Nm
7	22 Nm

Suggested tightening sequence: 1-2-3-4-5-6*-7



The tightening must also be carried out symmetrically on the opposite side of the bike.



* The total number of screws on the lower plate is 4.